

HYPERCORE™ **Data Acquisition System**


Product Datasheet



- Provides data fusion for connected instruments including hyperspectral, LiDAR, RGB, Thermal.
- Small, light, and rugged for UAV deployment
- Gigabit Ethernet and Base Cameralink
- Storage capacity: 470GB
- Power: 9.6W idle, 13.2W max.

PRODUCT DATA SHEET

HyperCore™	
Voltage (VDC)	10.5 - 32
Power (watts)	Idle 9.6; maximum 13.2
Size (mm / inches)	90 x 76 x 70 / 3.5" x 3.0" x 2.8"
Weight (kg / lb)	0.6 / 1.3
Storage capacity	470GB
Connections	Gigabit Ethernet (2); Base CameraLink, RS232/485 serial
Operating Temp. Range	-10-50 degrees C

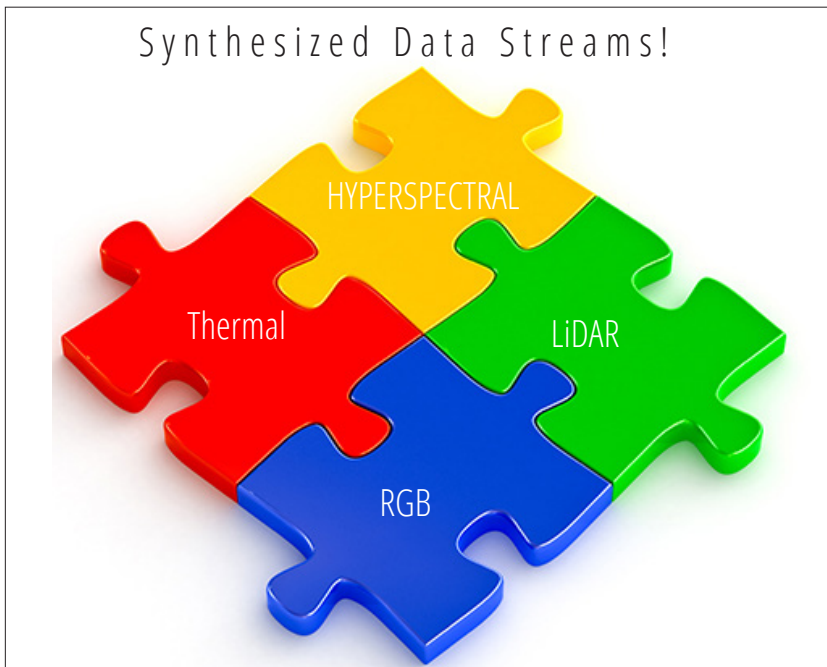

January 2018

Manufactured by Headwall Photonics, distributed in the UK and Ireland by **analytik**.